


To whom it concerns:

I hereby confirm that ZINGA can be applied on concrete.

Conditions and surface preparation :

- A waiting time of 28 days has to be respected so that the concrete is fully cured before the application of ZINGA.
- The formwork for the concrete is covered with oil. Therefore the concrete must be steam cleaned before the application of ZINGA.
- If the objective is to protect the reinforcement bars inside the concrete by means of the cathodic properties of ZINGA, then a metallic pathway must be installed between the rebar and the ZINGA.

Ghent, November 16<sup>th</sup> 2004

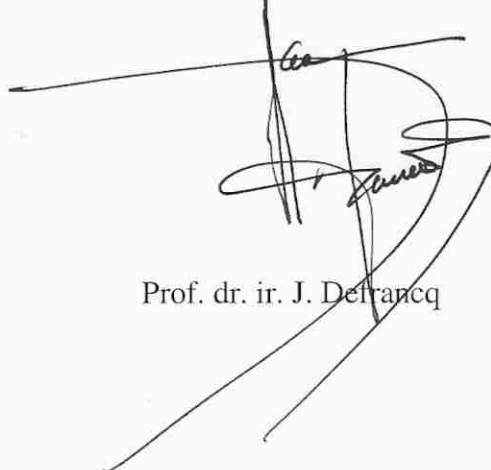

Prof. dr. ir. J. Defrancq